



Pnomatik veya Elektrikli sürme • AC veya Medium Frequency



X-45

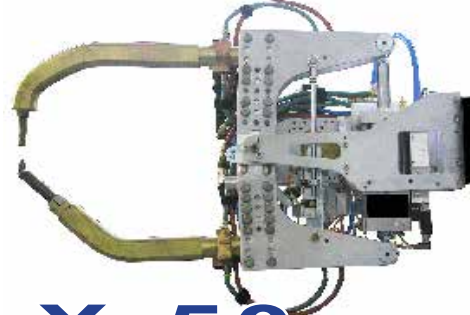


X-50



X-60




X-60-GF

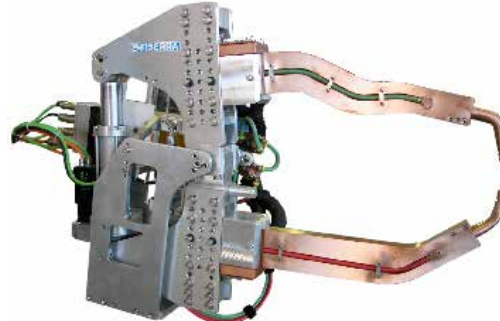


X-100



X-120

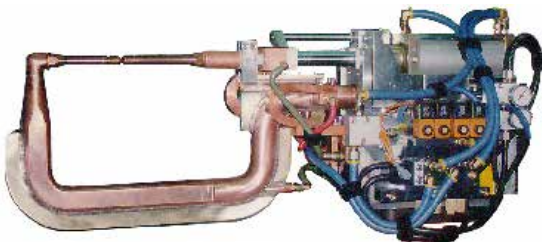

G-45

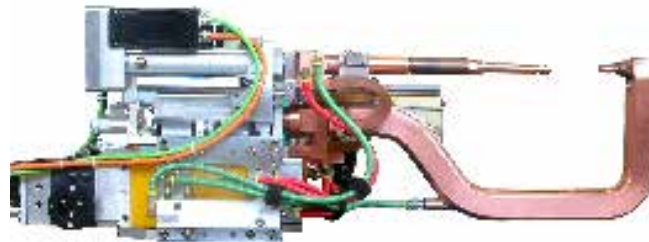

G-50



G-60

Robot Penseler

MODELLER		X45	X50	X60	X60-GF	X100	X120	C45	C50	C60	
Transformers AC		kVA/tipi	54 kVA - J • 76 kVA - J • 73 kVA - K • 92 kVA - K								
Transformers MF		kVA/tipi	75 kVA - J • 100 kVA - J • 78 kVA - K • 112 kVA - K								
Genel Bilgiler	Kol Çapları	mm	Ø 50		Ø 60		40x100		45	50	60
	Tabanca Gövdesi Max. Kuvvet	daN	500			750	500	750	570		
	Kollar Arasındaki Mesafe min / max	mm	200 / 230	275 / 450	350 / 650	350 / 500	249 / 524	200 / 750	75 - 300		85 - 370
	Kol Aksları Arası Mesafe	mm	30	25			-				
	Maksimum Kol Uzunlukları	mm	450	500	650	650	1200	750	280	320	450
	Soğutma Debisi	l/min	9								
	Su Giriş Sıcaklıkları min./ max.	°C	10 / 30								
	Penseye Min. Basıncı Hava Girişi	bar	1,5								
	Pense Ağırlığı (min-max)	Kg	90 - 120		105 - 135	110 - 140	116 - 143	135 - 160	60 - 90	60 - 90	85 - 125
PNOMATİK	Silindir Çapları	mm	100 / 125	80/100	100 / 125	125	100 / 125	125/140/160	70 / 90	70 / 90	70 / 90
	Silindir Yaklaşım Kursu	mm	60	100	100	100	100	60	50 / 100	50 / 100	50 / 100
	Yaklaşma Kursu Pense Dönüş Açısı	°	15°	18°	18°	18°	18°	11,5	--	--	--
	Silindir Strok	mm	30	30	30	30	30	30	46	46	46
	Pense Tam Kursta Dönüş Açısı	°	8°	6°	6°	6°	6°	5,8	--	--	--
	Max. Hava Basıncı	bar	10	10	10	10	10	10	10	10	10
	Silindir Baskı Kuvveti 10 bar	daN	785 / 1227	502 / 785	785 / 1227	1227	785 / 1227	1227/1539/2010	345 / 570	345 / 570	345 / 570
ELEKTRİK	Ana Baskı Motoru Max. Basınç	daN	1500	1500	1500	1500	1500	1500	750	750	750
	Ana Motor Strok	mm	90	140	140	140	140	90	145	145	145
	Ana Motor Ağırlığı	Kg	13,3	15	15	15	15	20	10	10	10
	Kompanzasyon Motoru Max. Baskısı	daN	213	213	213	213	213	213	213	213	213
	Kompanzasyon Motor Stroku	mm	26	26	26	26	26	26	26	26	26
	Kompanzasyon Motor Ağırlığı	Kg	3,9	3,9	3,9	3,9	3,9	3,9	3,9	3,9	3,9



Polígono Industrial Zona Franca Sector C, Calle D, nº 29
E-08040 BARCELONA
Tel. +34 93.26.17.100 Fax +34 93.26.17.110

www.serrasold.com
the world wide weld

QUALITY
MANAGEMENT
Certificate
Voluntary participation in regular
monitoring according to ISO 9001:2000



ENVIRONMENTAL
MANAGEMENT
Certificate
Voluntary participation in regular
monitoring according to ISO 14001

